


Modular LED-Lighting Systeme, individuelle Beleuchtung durch frei wählbare Segmente aus Bögen und Winkeln, Lichtkonzepte nach Ihrem Geschmack, individuelle Formen (Kurven, Kreise, etc.), als Aufbau- oder Pendelleuchte erhältlich, direkt/indirekt strahlend, mit hocheffizienter LED-Technologie bestückt, Gehäuse: schwarz RAL9005 (andere Farbe auf Anfrage), Standard nicht dimmbar oder DALI/SwitchDim, inkl. Konverter

# **SNAKE**

*Modular LED-Lighting System, custom lighting by arbitrary segments of arcs and angles, lighting concepts to your taste, custom shapes (curves, circles, etc.), available as ceiling mounted or pendant fixture, direct/ indirect distribution, equipped with highly efficient LED technology, housing: black RAL9006 (other color on request), Standard not dimmable or DALI/ SwitchDim, incl. converter*



**SNAKE**

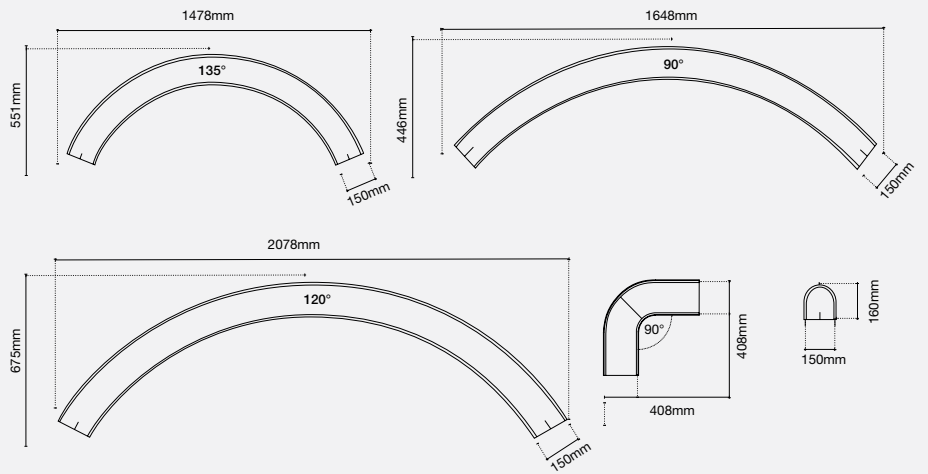

LED C E IP20 230V non SELV A

Artikelnummer item number	Typ type	1 Montage mounting	2 Kelvin kelvin	3 Farbe color	4 Dimm dimm
LS-SN-IN-90GRAD-1-2-3-4	90° Bogen 90° curve	» C « Decke ceiling  » P « Pendel pendant	» 3000 « » 4000 «	B = ●	» D « DALI, Switch Dimm
LS-SN-IN-120GRAD-1-2-3-4	120° Bogen 120° curve				
LS-SN-IN-135GRAD-1-2-3-4	135° Bogen 135° curve				
LS-SN-IN-ECK-1-2-3-4	90° Ecke 90° corner				
LS-SN-IN-END-1-2-3-4	Endstück end piece				

Gehäusefarbe Standard in schwarz RAL9005

direkt/ indirekt strahlend

housing color standard in black RAL9005


direct/ indirect shining

ARTIKELNUMMER ITEM NUMBER	WATT TOTAL WATT TOTAL	PRIMÄR PRIMARY	SEKUNDÄR SECONDARY	WINKEL ANGLE	NETTO-LUMEN NET-LUMEN	KELVIN KELVIN	CRI CRI	TYP TYPE
LS-SN-IN-90GRAD-1-3000-B-5	53W	100 ~ 240V AC	300mA	120°	3460lm	3000K	>90Ra	90° Bogen 90° curve
LS-SN-IN-90GRAD-1-4000-B-5	53W	100 ~ 240V AC	300mA	120°	3590lm	4000K	>90Ra	90° Bogen 90° curve
LS-SN-IN-120GRAD-1-3000-B-5	69W	100 ~ 240V AC	300mA	120°	4613lm	3000K	>90Ra	120° Bogen 120° curve
LS-SN-IN-120GRAD-1-4000-B-5	69W	100 ~ 240V AC	300mA	120°	4787lm	4000K	>90Ra	120° Bogen 120° curve
LS-SN-IN-135GRAD-1-3000-B-5	53W	100 ~ 240V AC	300mA	120°	3460lm	3000K	>90Ra	135° Bogen 135° curve
LS-SN-IN-135GRAD-1-4000-B-5	53W	100 ~ 240V AC	300mA	120°	3590lm	4000K	>90Ra	135° Bogen 135° curve
LS-SN-IN-ECK-1-3000-B-5	14,8W	100 ~ 240V AC	300mA	120°	1153lm	3000K	>90Ra	90° Ecke 90° corner
LS-SN-IN-ECK-1-4000-B-5	14,8W	100 ~ 240V AC	300mA	120°	1196lm	4000K	>90Ra	90° Ecke 90° corner
LS-SN-IN-END-1-3000-B-5	3,7W	100 ~ 240V AC	300mA	120°	288lm	3000K	>90Ra	Endstück end piece
LS-SN-IN-END-1-4000-B-5	3,7W	100 ~ 240V AC	300mA	120°	299lm	4000K	>90Ra	Endstück end piece



1 = C = Deckenmontage oder » P « Pendelmontage; 5 = D = dimmbar DALI/ SwitchDIM  
 1 = C = ceiling installation or » P « pendant installation; 5 = D = dimmable DALI/ SwitchDIM



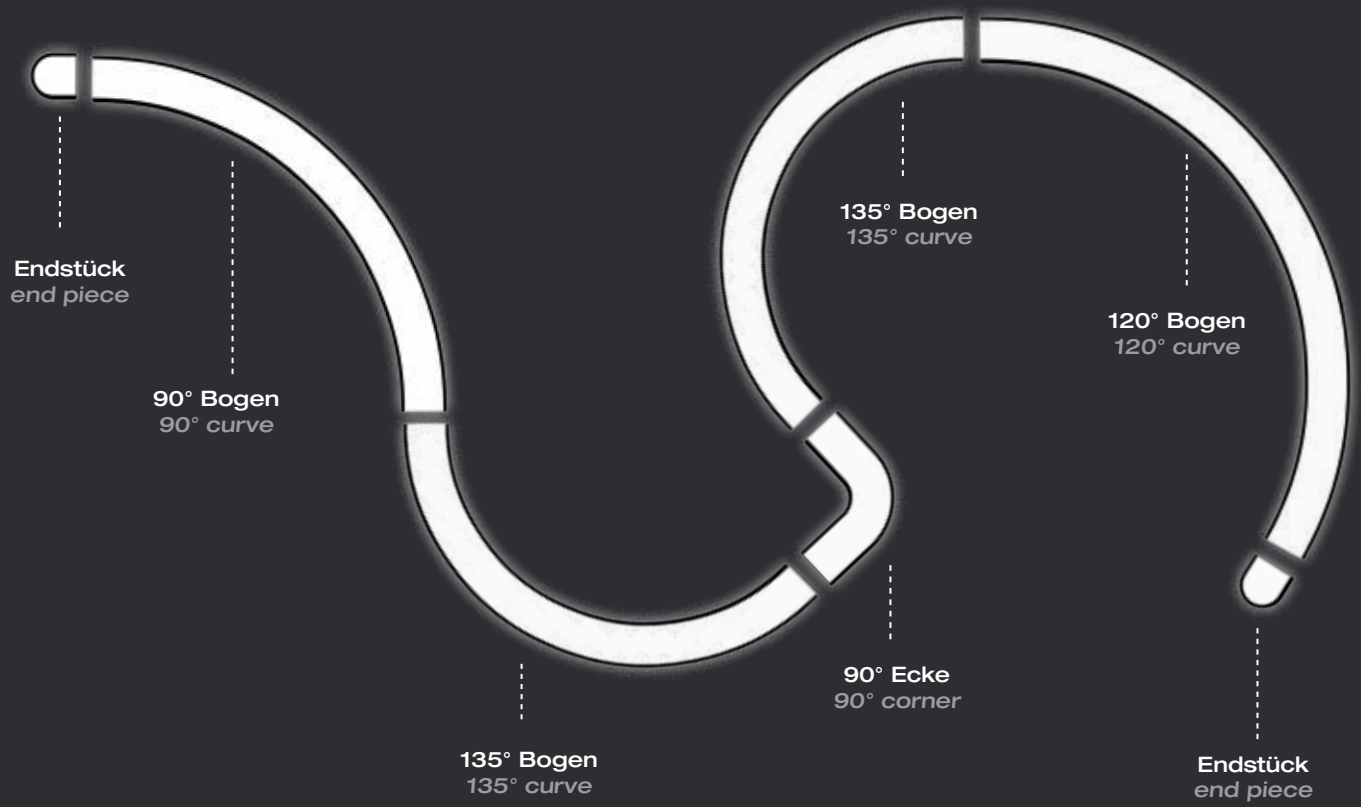





© bild[ART]isten

