


Product family

LOLLO 10

Orientable recessed luminaires offer the best performance in extremely compact sizes, orientation 45°, protection class: IP20, minimalist and sophisticated design, excl. converter (not dimmable or dimmable via PUSH / 1-10V / DALI must be ordered separately)

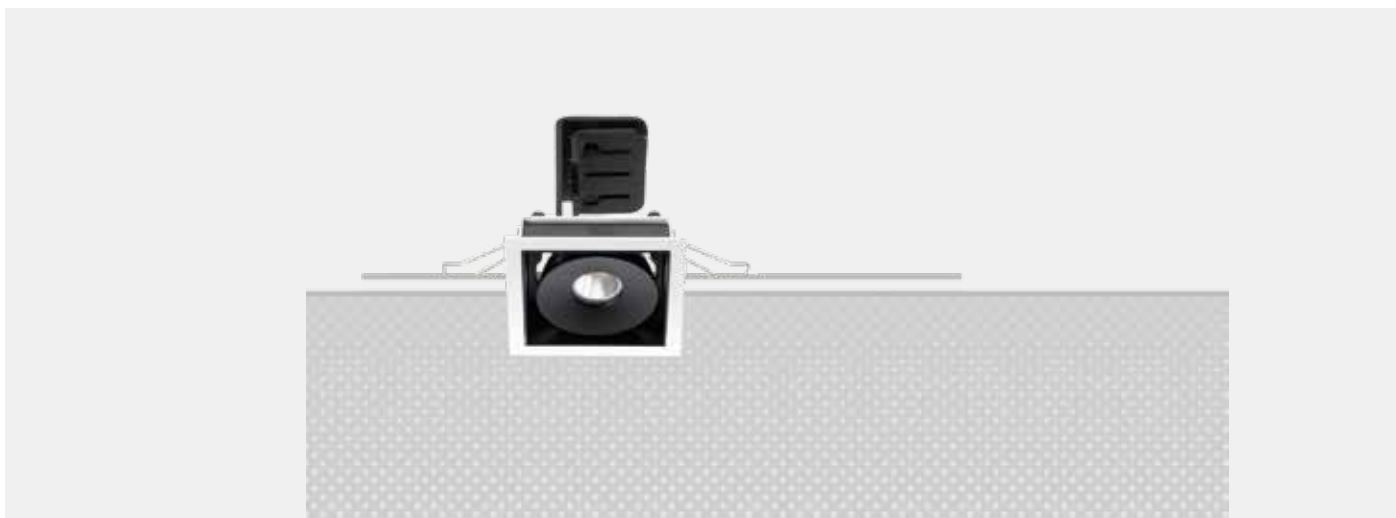

ADVANTAGES

- slim and compact design
- excl. converter (not dimmable or dimmable via PUSH / 1-10V / DALI must be ordered separately)

CHARACTERISTIC

- swiveling recessed downlight (45°)
- Housing colors can be selected: gray, black or white
- protection IP20
- Standard LED beam angle 46°
- Other light colors and beam angles on request

Product overview:

Types:



LOLLO 10

Light emission:



direct


Housing colors:



grey




black




white


Angle



Standard



(on request)



(on request)


Light colors:



2700K superwarm white




3000K warm white



4000K neutral white
(on request)

Drawings:

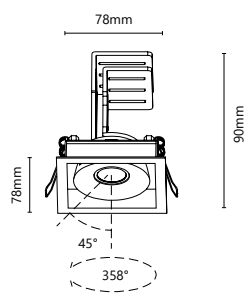

Cut-Out	70 x 70mm
Installation depth	90mm

Article overview:

item number	typ	1 angle	2 kelvin	3 color
FL-LL1 1 8 2 3	LOLLO 10 LED 10W 250mA	» 2 « 46	» 0 « 2700K » 1 « 3000K	» G « grey » N « black » W « white

Technical information:

LOLLO 10

Total watt:	10W	
Net lumen:	890lm	1000lm
Kelvin (CCT):	2700K	3000K
Angle:	46° Standard	
CRI:	> 85Ra	
Light emission:	direct	
Protection:	IP20	
Life expectancy:	50.000h	
Voltage:	100~230V AC/ 250mA DC	