

Product family

MAHALO

Projectors equipped with COB LEDs and supplied with 24VDC COB, made of anodized aluminum, excl. converter (not dimmable or dimmable via PUSH / 1-10V / DALI must be ordered separately)



ADVANTAGES

- excl. converter (not dimmable or dimmable via PUSH / 1-10V / DALI must be ordered separately)

CHARACTERISTIC

- Pivotal projector
- 3 selectable housing colors
- Degree of protection IP65
- LED beam angle standard 60°
- Other light colors and beam angles on request.




Product overview::

Types:



MAHALO



Ground spike
(optional)

Light emission:



direct

Housing colors:



aluminum




bronze




black

Angle:




60°

Standard




36°

(on request)



46°

(on request)




120°

(on request)


Light colors:



2700K superwarm white




3000K warm white



4000K neutral white
(on request)

Drawings:

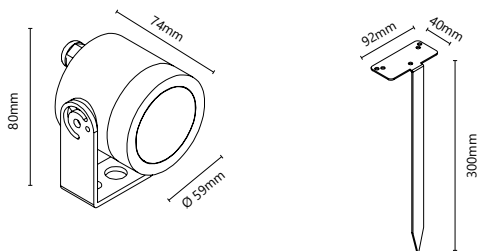

Article overview:

item number	type	① angle	② kelvin	③ color
FL-MH1 ①②③	MAHALO LED 7W 24V DC	» 3 « 60°	» 0 « 2700K » 1 « 3000K	» A « aluminum » B « bronze » N « black
FL-CP0022	ground spike			

Technical information:

MAHALO

Total watt:	7W	
Net lumen:	630lm	700lm
Kelvin (CCT):	2700K	3000K
Angle:	60° Standard	
CRI:	>85Ra	
Light emission:	direct	
Protection:	IP65	
Life expectancy:	50.000h	
Voltage:	100~230V AC/ 24V DC	