


Product family

ZERO R6

Frameless recessed luminaire with a diameter of only 30mm and an extremely simple fastening system on the formwork, with built-in optics for improved visual comfort, excluding converter (not dimmable or dimmable via PUSH / 1-10V / DALI must be ordered separately

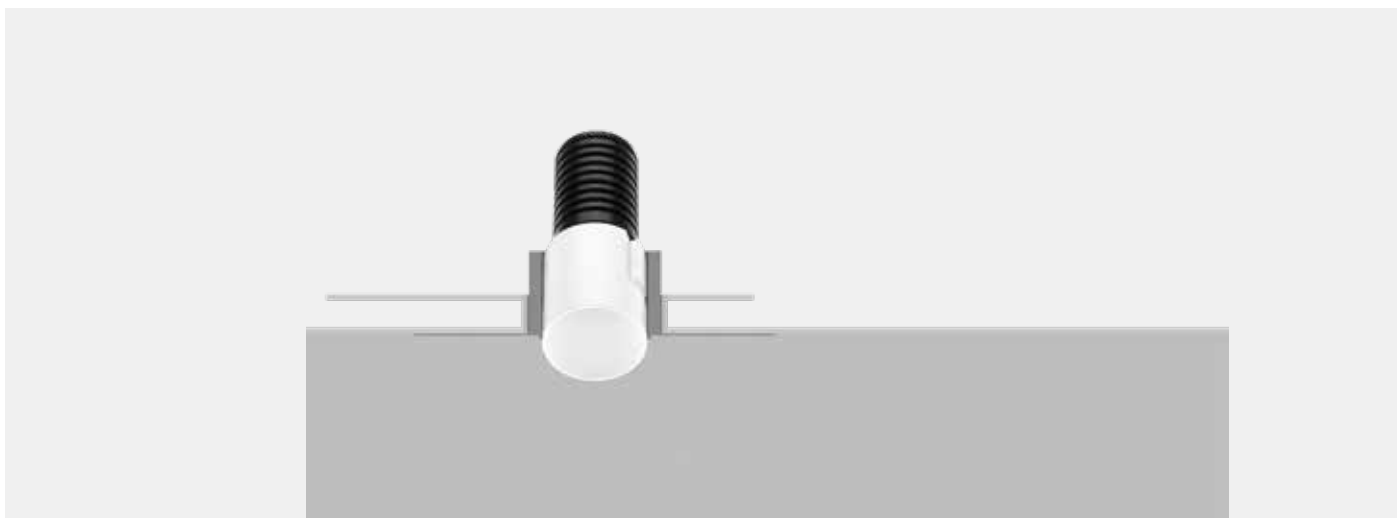

ADVANTAGES


- frameless recessed luminaire
- excl. converter (not dimmable or dimmable via PUSH / 1-10V / DALI must be ordered separately

CHARACTERISTIC


- Fixed recessed downlight
- 2 selectable housing colors
- Degree of protection IP44
- LED beam angle standard 40°
- Other light colors and beam angles on request.

Product overview:

Types:

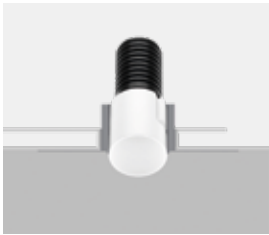

ZERO R6



Housing drywall
(optional)

Light emission:




direct

Housing color:




black




white

Angle:



Standard



(on request)


Light color:




2700K superwarm white



3000K warm white



4200K neutral white
(on request)



6000K cold white
(on request)



blue (on request)





green (on request)



red (on request)

Drawings:



Cut-Out	Ø 44mm
Installation depth	77mm

Article overview:

item number	type	1 angle	2 kelvin	3 color
FL-ZW1 1 2 3	ZERO R6 LED 3W 350mA oder 62W 500mA	» 2 « 40°	» 0 « 2700K » 1 « 3000K	» N « black » W « white
FL-ZQC001	Housing drywall white			
FL-ZQC001B	Housing drywall black			

Technische Informationen:

ZERO R6		
Total watt:	3W 6W	
Net lumen:	267lm (3W) 384lm (6W)	279lm (3W) 400lm (6W)
Kelvin (CCT):	2700K	3000K
Angle:	40° Standard	
CRI:	>85Ra	
Light emission:	direct	
Protection:	IP44	
Life expectancy:	50.000h	
Voltage:	100~230V AC/ 350mA DC (3W) 100~230V AC/ 500mA DC (6W)	