


Product family

LEWO30

Linear profile systems for individual room designs, made of extruded aluminum profile, available as surface-mounted, pendant and recessed luminaire, wide range of variants with covers (opal and black polycarbonate covers, spotlights and pendant lights), technically highly efficient LED technology with branded circuit boards, available in the light colors 2700K / 3000K / 4000K, optionally not dimmable or DALI / SwitchDIM

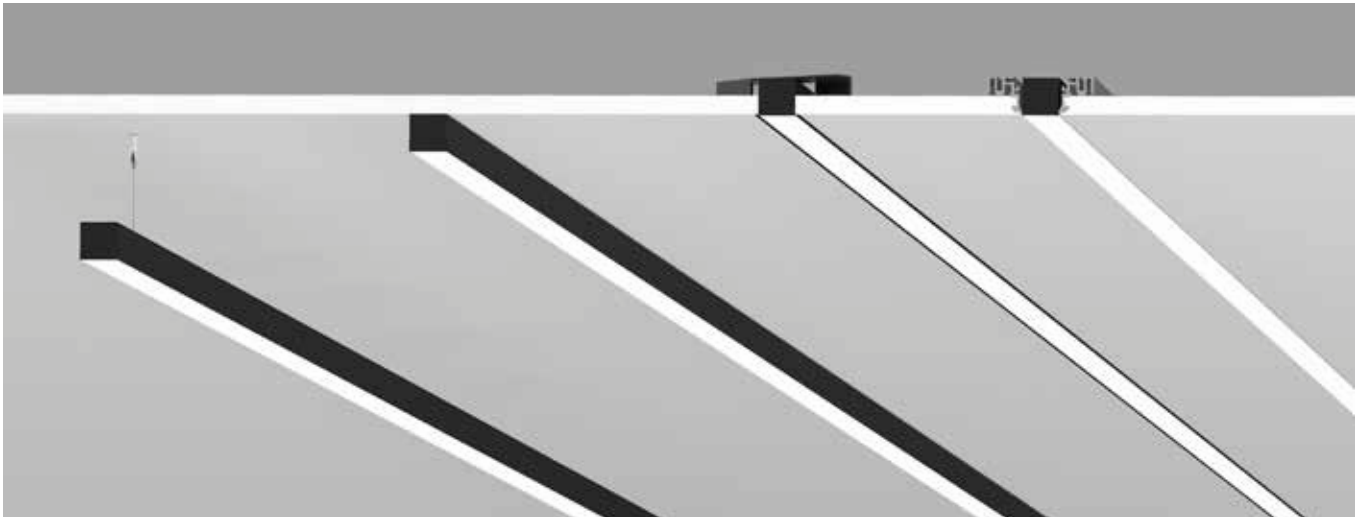

ADVANTAGES

- ideal for application as mirror lighting
- black polycarbonate cover for accent lighting available
- not dimmable or DALI / SwitchDIM


CHARACTERISTIC

- available as a surface-mounted, built-in or pendulum profile
- made of extruded aluminum profile
- housing colors anodized aluminum, matt black (RAL9005), aluminum anodized or white matt (RAL9016)
- with 4 covers possible or LEWO SPOT spotlight and suspension lamp STRING in black and white
- protection IP20
- optionally not dimmable or DALI / SwitchDIM
- LED branded boards or branded strips
- max. Profile length 6000mm continuously
- profile including standard LED strips 26W (special wattages on request)
- integrated converter on request




Product overview:


Installation:

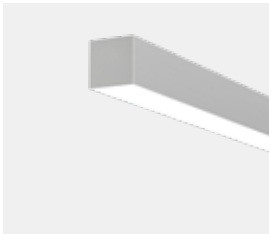


ceiling

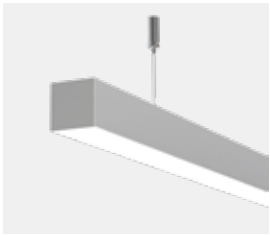

pendant

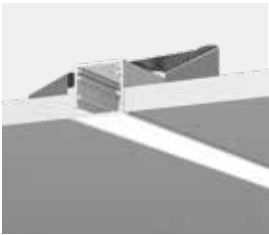

recessed with frame

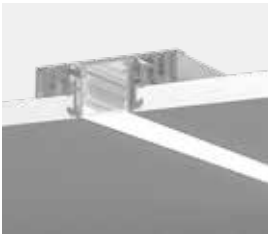

recessed frameless


Housing color:



RAL9005 black matt




anodised aluminum




RAL9016 white matt

Covers:

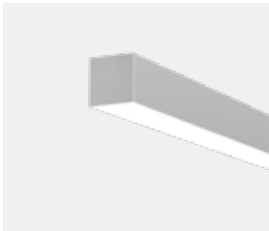


Polycarbonate cover opal/
flat

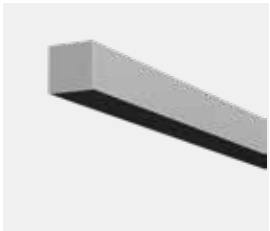

Polycarbonate cover
black/flat




Polycarbonate cover
opal/high

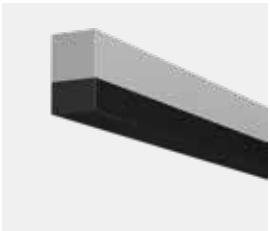

Polycarbonate cover
black/high



with pendant fixture
STRING

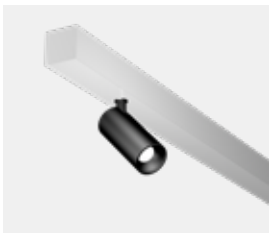

with LEWO Spot




Light color:



2700K super warm white



3000K warm white



4000K neutral white

**Standard-
Length:**

610mm


910mm

1210mm

1510mm

1810mm

Control:



switchable (Standard)



DALI dimmable











Technical information:

technical description	Standard profile length				
	610mm	910mm	1210mm	1510mm	1810mm
module power Total	16W	24W	31W	39W	47W
netlumen (opal/ flat)	695lm (SW) 806lm (WW) 894lm (NW)	1036lm (SW) 1202lm (WW) 1333lm (NW)	1378lm (SW) 1598lm (WW) 1773lm (NW)	1719lm (SW) 1994lm (WW) 2212lm (NW)	2060lm (SW) 2390lm (WW) 2652lm (NW)
netlumen (opal/ U-Form)	1071lm (SW) 1242lm (WW) 2260lm (NW)	1597lm (SW) 1853lm (WW) 2057lm (NW)	2124lm (SW) 2464lm (WW) 2735lm (NW)	2651lm (SW) 3075lm (WW) 3413lm (NW)	3178lm (SW) 3686lm (WW) 4091lm (NW)
netlumen (black/ flat)	105lm (SW) 122lm (WW) 135lm (NW)	157lm (SW) 182lm (WW) 202lm (NW)	209lm (SW) 242lm (WW) 269lm (NW)	260lm (SW) 302lm (WW) 335lm (NW)	312lm (SW) 362lm (WW) 402lm (NW)
netlumen (black/ U-Form)	332lm (SW) 385lm (WW) 427lm (NW)	496lm (SW) 575lm (WW) 637lm (NW)	659lm (SW) 764lm (WW) 847lm (NW)	822lm (SW) 953lm (WW) 1058lm (NW)	985lm (SW) 1143lm (WW) 1268lm (NW)
PRI/ SEC	100 ~ 240V AC/ 24V DC				
CRI	>95Ra				
Protection	IP20				
Life expectancy	50.000h				

Article overview:


item number	1 installation	2 cover	3 kelvin	4 color	5 control
LS-30-1-610-2-3-4-5	» C « ceiling » P « pendant » E « recessed (with frame) » C « recessed Frameless (Frame below order in addition)	» O « opal / flat » U « opal / high » OB « black / flat » UB « black / high	» 2700 « » 3000 « » 4000 «	B = ● S = ● W = ○	» D « DALI, SwitchDim
LS-30-1-910-2-3-4-5					
LS-30-1-1210-2-3-4-5					
LS-30-1-1510-2-3-4-5					
LS-30-1-1810-2-3-4-5					
Installation frame including mounting bracket and drilling screws with a ceiling thickness of 12.5mm					
LS-30-R-FRAME1-1	» 610 « for standard length 610mm » 910 « for standard length 910mm » 1210 « for standard length 1210mm » 1510 « for standard length 1510mm » 1810 « for standard length 1810mm				

Drawings:

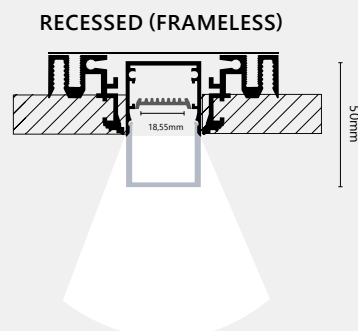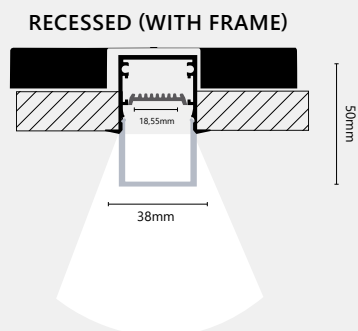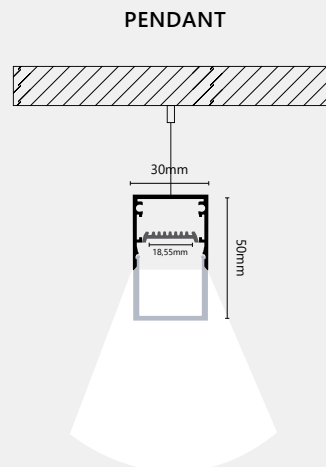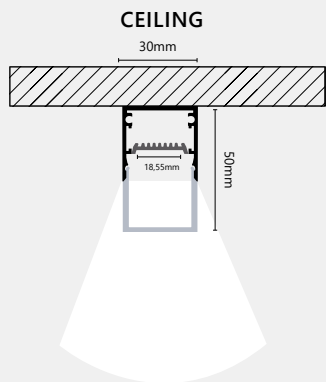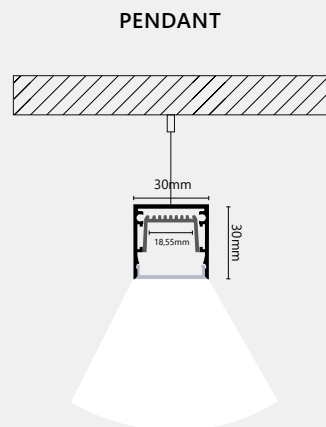



Special solutions:


Special designs do not have a fixed article number and are always produced at the customer's request. Please specify separately.

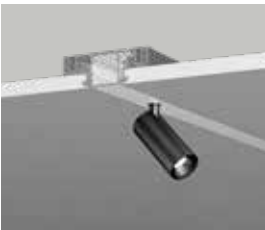

LEWO SPOT ● ● ●

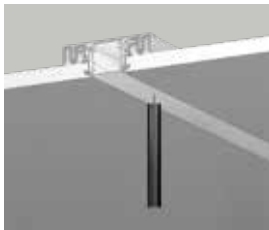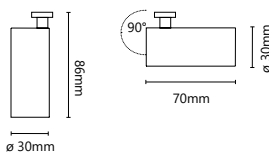

STRING LED ● ●

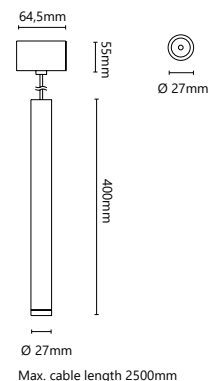

LEWO CONCRETE


Please contact us for more information.

LEDWORKS®

LEWO 30 made to measure with integrated converter



mirror lighting

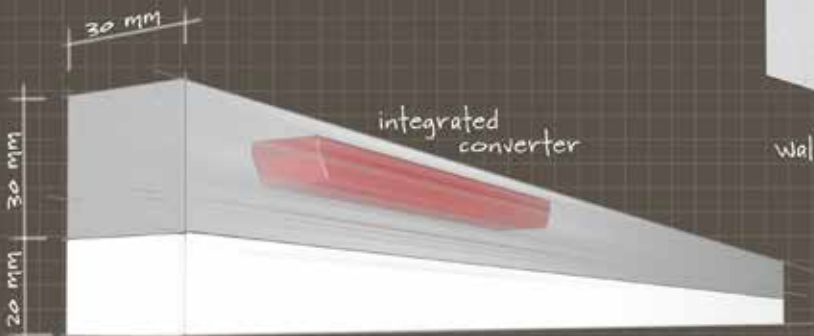

integrated converter



wall lighting

Colors black, white, anodized aluminum



suspension

