


Product family

LEWO46 3PH SYSTEM

Linear profile systems with 3ph. adapter, made of extruded aluminum profile, available with construction profile LEWO46, 2 selectable covers, available in the light colors 2700K/ 3000K/ 4000K, incl. integrated converter, optionally dimmable via DALI or SwitchDIM (1-10V on request)

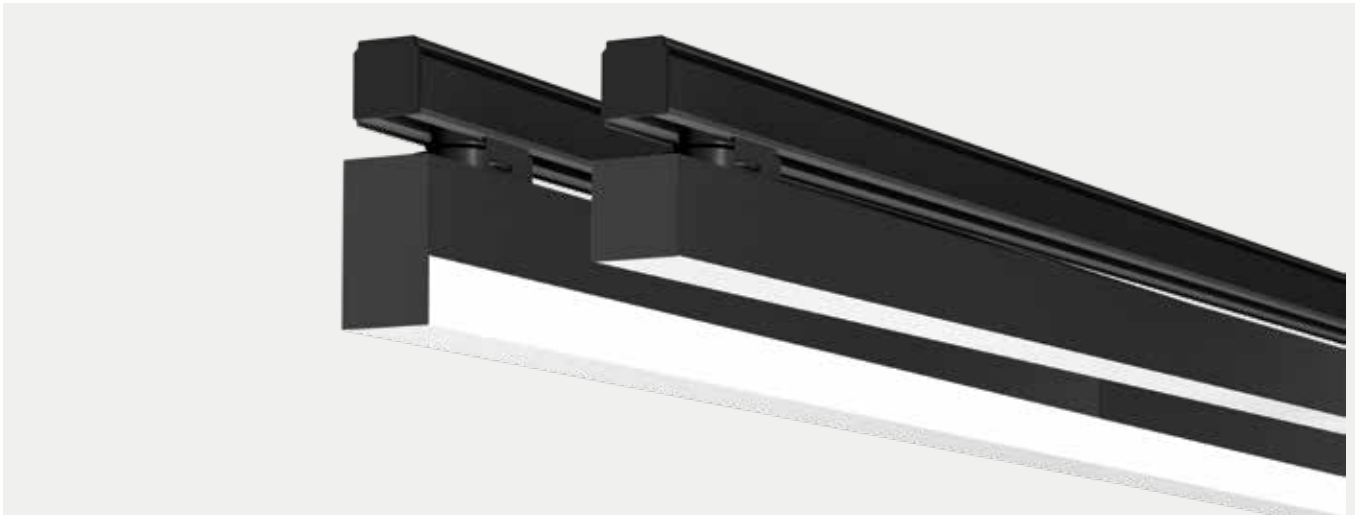

ADVANTAGES

- including integrated converter
- optionally dimmable via DALI or SwitchDIM (1-10V on request)


CHARACTERISTIC

- ceiling profile incl. 3ph. adapter
- made of extruded aluminum profile
- Housing colors anodized aluminum, matt black (RAL9005), aluminum anodized) or white matt (RAL9016)
- available with 2 covers
- protection IP20
- max. profile length 6000mm continuously
- Profile including standard LED strips 3x 12W
Special wattages on request



Product overview:

Installation:



ceiling


Housing colors:



RAL9005 black matt




anodized aluminum




RAL9016 white matt

Covers:



cover polycarbonate
opal / flat



cover polycarbonate
opal / high




Light color:



2700K super warm weiss




3000K warm weiss




4000K neutral weiss


Standard- Length:




610mm




910mm




1210mm



1510mm



1810mm

Control:

switchable (Standard)



DALI/ SwitchDIM dimmable

Technical information:

technical description	Standard profile length				
	610mm	910mm	1210mm	1510mm	1810mm
module power Total	22W	33W	44W	54W	65W
netlumen (opal/ flat)	1230lm (SW) 1250lm (WW) 1299lm (NW)	1835lm (SW) 1865lm (WW) 1938lm (NW)	2439lm (SW) 2479lm (WW) 2577lm (NW)	3044lm (SW) 3094lm (WW) 3216lm (NW)	3649lm (SW) 3709lm (WW) 3855lm (NW)
netlumen (opal/ U-Form)	1242lm (SW) 1262lm (WW) 1312lm (NW)	1853lm (SW) 1883lm (WW) 1958lm (NW)	2464lm (SW) 2504lm (WW) 2603lm (NW)	3075lm (SW) 3125lm (WW) 3248lm (NW)	3685lm (SW) 3746lm (WW) 3894lm (NW)
PRI/ SEC	100 ~ 240V AC/ 24V DC				
CRI	90Ra				
Protection	IP20				
Life expectancy	50.000h				

Article overview:

item number	1 installation	2 cover	3 kelvin	4 color	5 control
LS-46-1-610-2-3-4-5-3PH	» C « ceiling	» O « opal / flat » U « opal / high	» 2700 « » 3000 « » 4000 «	B = ● S = ● W = ○	» D « DALI, SwitchDim
LS-46-1-910-2-3-4-5-3PH					
LS-46-1-1210-2-3-4-5-3PH					
LS-46-1-1510-2-3-4-5-3PH					
LS-46-1-1810-2-3-4-5-3PH					

Drawings:

