

Product family

STAND-19

floor fixture made of extruded anodised aluminium, head 1-piece with equipment carrier for converter, stand made of extruded aluminium, base and head in steel sheet, stand and base are powder-coated fine extruded matt black (RAL9005) or matt white (RAL9016), new version (TW) powder-coated fine extruded matt black (RAL9005) available, only in direct component to micro prismatic lens indirect component via clear diffuser for better light distribution, color temperature: 4000 Kelvin and Tuneable White (2700-6500K) on request also in 3000 Kelvin, incl. micro-prismatic lens cone glare clear, incl. connection cable 4000mm transparent or black with safety plug, incl. ON-/OFF-touch dimmer, daylight/ motion detector, by TW version 1 taster brightness and 1 taster light color, incl. power supply DALI dim



ADVANTAGES

- now also available Tuneable White (2700K-6500K)

CHARACTERISTIC

- made of extruded aluminum
- body matt black (RAL9005) or matt white (RAL9016)
- direct / indirect distribution
- 2 buttons on / off button dimmer, daylight and motion detector
- 1 button brightness, 1 button light color at TUNEABLE WHITE version
- black or transparent connecting cable 4000mm with plug



Product overview:

Housing color:




matt black (RAL9005)



matt white (RAL9016)

Light color:




4000K neutral white



Tuneable White 2700K - 6500K

Drawings:

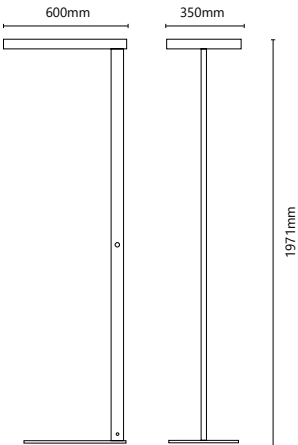

Technical information:

Total watt:	90W	96W
Net lumen:	3232lm direct 7295lm indirect	3000lm direct 7000lm indirect
Kelvin (CCT):	4000K	2700-6500K
Protection:	IP20	
CRI:	>80Ra	>90Ra
Life expectancy:	50.0000h	
Voltage:	100~230V AC/ 230V DC	
Converter:	integrated converter (DALI dimmable)	

Article overview:

item number	types	1 kelvin	2 color
LW-ST19-1-2	STAND-19	» 4000 « 4000K » TW « 2700-6500K	» B « black » W « white