

Family data sheet



OJO SPOT RETANGLE

Recessed luminaire with subtle appearance and visible glare, right light opening with \varnothing 10mm, with masking insert set back, beam angle 2x 20° or 2 x 40°, housing aluminum powder-coated for tool-free installation in the ceiling, tunable solution (TW) possible on request, LED board can be defended (screwed), fade-out rings in different colors possible




CHARACTERISTICS

- housing black (RAL9005) or white (RAL9010)
- black or white masking ring
- selectable angles 2x 20 ° or 2x 40 °
- excl. converter (must be ordered separately)
- dimmable on request

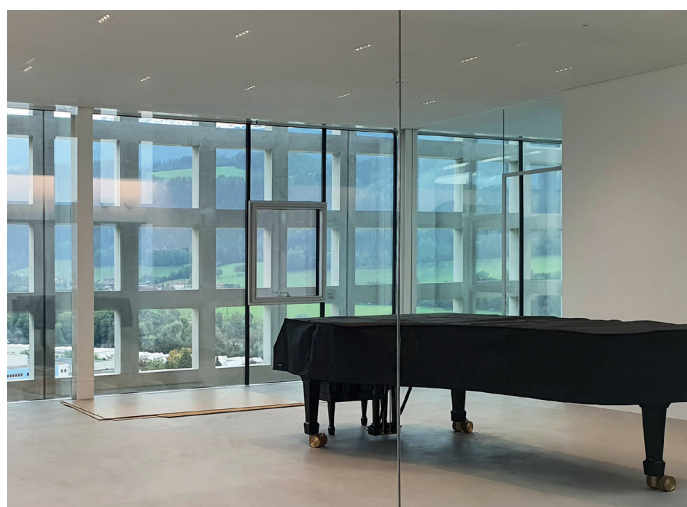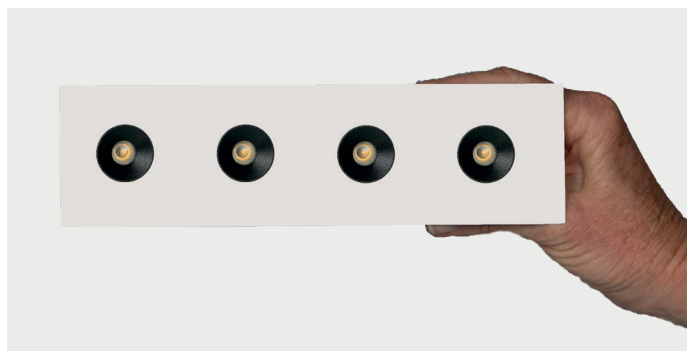


Product overview:

Housing:




black




white

Ring:



black



white


Light color:



2700K super warm white



3000K warm white




4000K neutral white



2200K - 5700K
(on request)

Angle:



2x 20°





2x 40°

Technical information:

2x 20°			
Watt Total:	17W		
Reflector:	2x 20°		
Net lumen:	1360lm	1470lm	1560lm
Kelvin (CCT):	2700K	3000K	4000K
CRI:	>90Ra		
Protection:	IP20		
Agility:	riged		
Class:	3		
Life expectancy:	50.000h L80B20 ta=25°C		
Voltage	max. 700mA		
Dimmability:	on request		
Converter:	excl. external converter		

2x 40°			
Watt Total:	17W		
Reflector:	2x 40°		
Net lumen:	1360lm	1470lm	1560lm
Kelvin (CCT):	2700K	3000K	4000K
CRI:	>90Ra		
Protection:	IP20		
Agility:	riged		
Class:	3		
Life expectancy:	50.000h L80B20 ta=25°C		
Voltage	max. 700mA		
Dimmability:	on request		
Converter:	excl. external converter		

Drawing:

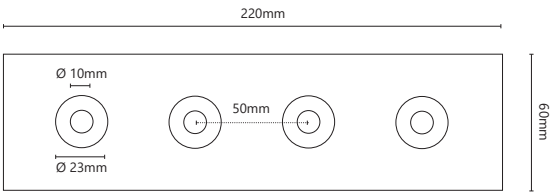

Cut-Out: 210 x 45 x 60mm
Installation depth: 60mm

item number	type	1 kelvin	2 refelctor	3 color	4 Ausblendring	control
LW-OJ-RE-01-1-2-3-4	» 01 « 4 x 1	» 2700 « » 3000 « » 4000 «	» 20 « 2x 20° » 40 « 2x 40°	» B « black » W « white	» B « black » W « white	excl. external converter