


Product family


GLOSSY

Round recessed downlight made of aluminum, for ceiling or wall installation, frameless or with edge, housing color white, available with different interior reflectors, rigid, with integrated LED circuit board, CRI>90Ra, including external converter (switchable)

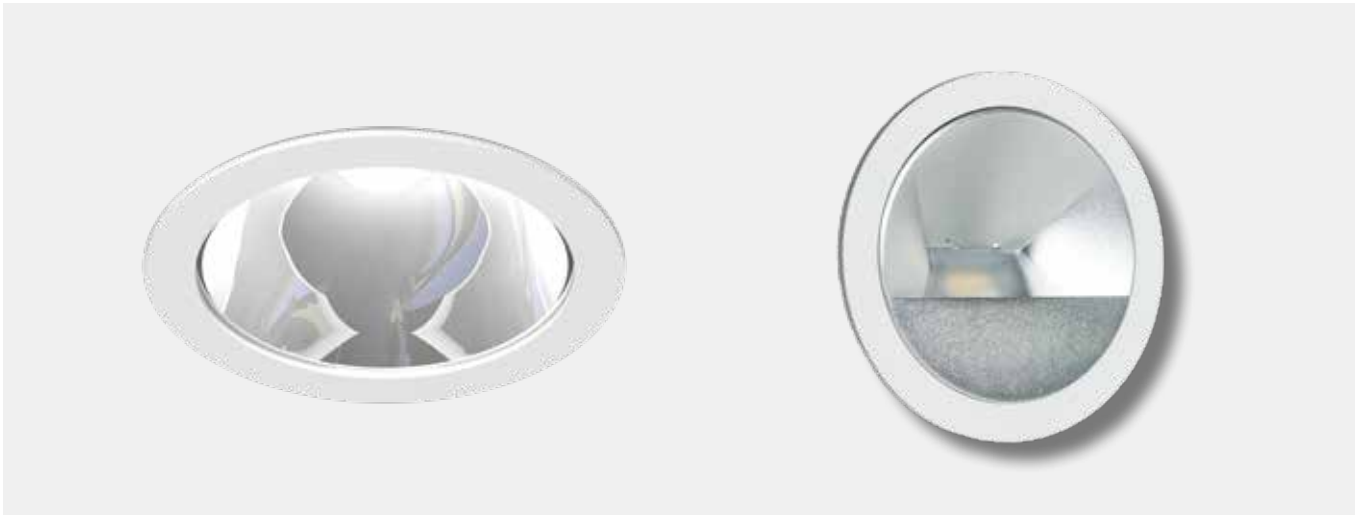

CHARACTERISTIC

- made of aluminium
- with rim or frameless version
- rigid
- with integrated LED insert
- housing color: white
- ceiling cutout: 100mm
- degree of protection: IP20
- incl. external converter (switchable)

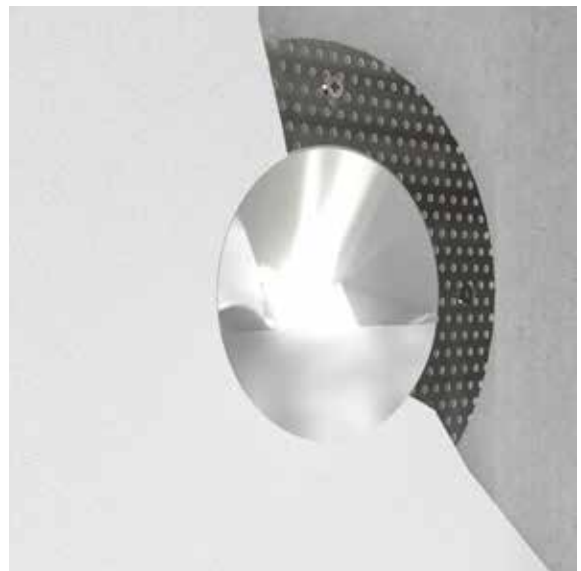

Product overview:


Types:




GLOSSY LED



GLOSSY FRAMELESS

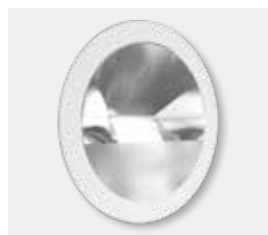


GLOSSY WALL

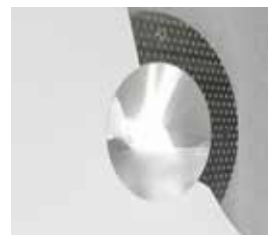

GLOSSY WALL FRAMELESS

Housing color:




white

inner reflector GLOSSY & GLOSSY FRAME- LESS:



white/ specular



white/ white




white/ gold

inner reflector- GLOSSY WALL & GLOSSY WALL FRAMELESS:



white/ chrom




white/ white

Light color:





3000K warm white

Control:





switchable



Drawings:





GLOSSY LED

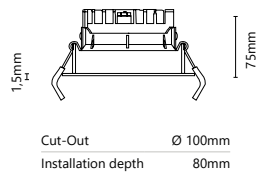

GLOSSY WALL



GLOSSY FRAMELESS

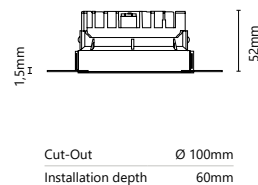

GLOSSY WALL FRAMELESS

Technical information:

GLOSSY LED & GLOSSY FRAMELESS

Total watt:	13W
Net lumen:	1110lm
Kelvin (CCT):	3000K
Protection:	IP20
CRI:	>90Ra
Beam Angle:	74.9°
Life expectancy:	50.000h
Voltage:	100 ~ 230V AC/ 350mA DC

GLOSSY WALL & GLOSSY WALL FRAME

Total watt:	9W
Net lumen:	520lm
Kelvin (CCT):	3000K
Protection:	IP20
CRI:	>90Ra
Beam Angle:	85°
Life expectancy:	50.000h
Voltage:	100 ~ 230V AC/ 700mA DC

Article overview:

item number	1 types	2 kelvin	3 color
LW-1-R-13-2-3	» GLO « GLOSSY LED » GLOF « GLOSSY FRAMELESS	» 3000 «	» WS « white/ specular » WW « white/ white » WG « white/ gold

item number	1 types	2 kelvin	3 color
LW-1-W-09-2-3	» GLO « GLOSSY WALL » GLOF « GLOSSY WALL FRAMELESS	» 3000 «	» WC « white/ chrome » WW « white/ white