


Product family

LA-FLEX-Z

Flexible LED strips with self-adhesive back, especially suitable for curves, lifespan up to 50,000 hours, excl. converter/control unit, excl. cooling profile, max. length per feed: 3 or 5m, available per linear meter

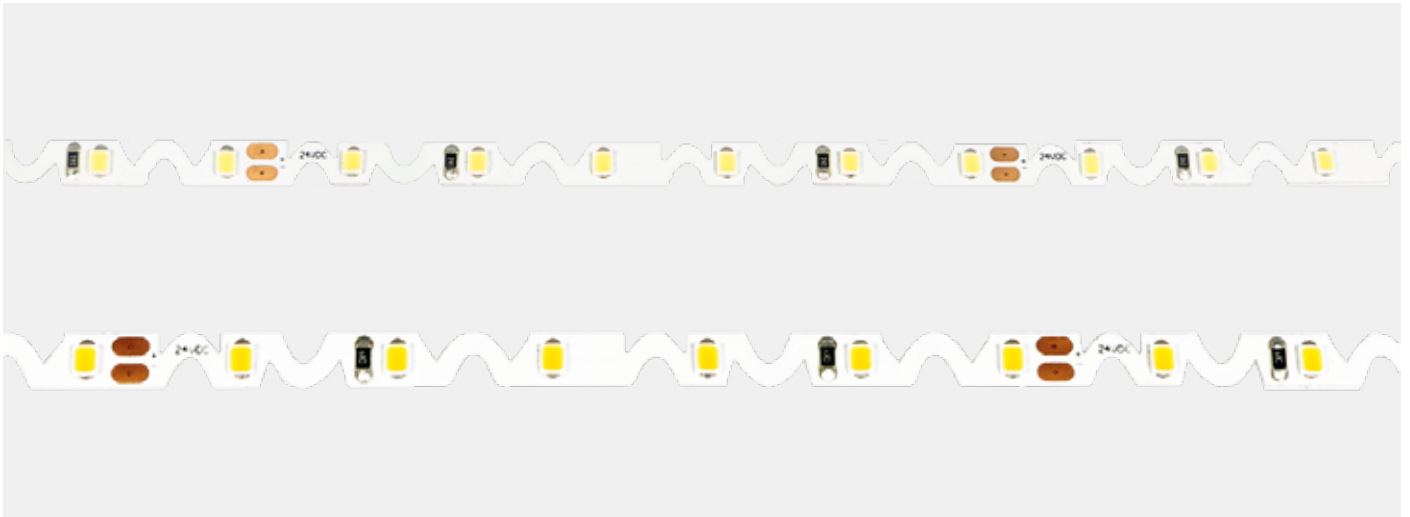

CHARACTERISTIC

- 5W / meter or 12W / meter
- especially suitable for curves
- very narrow LED stripes
- degree of protection: IP20
- protection class: 3
- CRI > 94Ra
- ovoltage 24V DC


SPECIAL FEATURE

- especially suitable for curves



Product overview:

Types:



LA-FLEX-Z-05




LA-FLEX-Z-12


Light colors:



2700K super warm white



3000K warm white



4000K neutral white

Technical information:

LA-FLEX-Z-05


LED:	2835 High Brightness SMD LED		
Total watt:	4.8W/ meter		
Net lumen:	360lm/m	360lm/m	390lm/m
Kelvin (CCT):	2700K	3000K	4000K
CRI:	>94Ra		
Number of LEDs:	60 LEDs/ meter		
Life expectancy:	50.000 hours		
Voltage:	24V DC		
supply feed:	5m per supply feed		

LA-FLEX-Z-12


LED:	2835 High Brightness SMD LED		
Total watt:	12W/ meter		
Net lumen:	780lm/m	780lm/m	840lm/m
Kelvin (CCT):	2700K	3000K	4000K
CRI:	>94Ra		
Number of LEDs:	60 LEDs/ meter		
Life expectancy:	50.000 hours		
Voltage:	24V DC		
supply feed:	3m per supply feed		

Drawings:

LA-FLEX-Z-05

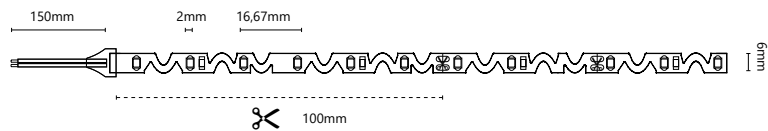

LA-FLEX-Z-12

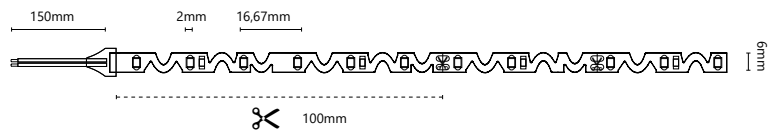

Article overview:

item number	product name	W	K	lm	IP	CRI	...
LA24-Z-SW-05-24-IP20	LA-FLEX-Z-05	4,8W/m	2700K	360lm/m	IP20	94Ra	60/m
LA24-Z-WW-05-24-IP20	LA-FLEX-Z-05	4,8W/m	3000K	360lm/m	IP20	94Ra	60/m
LA24-Z-NW-05-24-IP20	LA-FLEX-Z-05	4,8W/m	4000K	390lm/m	IP20	94Ra	60/m
LA24-Z-SW-13-24-IP20	LA-FLEX-Z-12	12W/m	2700K	780lm/m	IP20	94Ra	60/m
LA24-Z-WW-13-24-IP20	LA-FLEX-Z-12	12W/m	3000K	780lm/m	IP20	94Ra	60/m
LA24-Z-NW-13-24-IP20	LA-FLEX-Z-12	12W/m	4000K	840lm/m	IP20	94Ra	60/m