


SPOTY ROUND 3, SCHWENKBAR

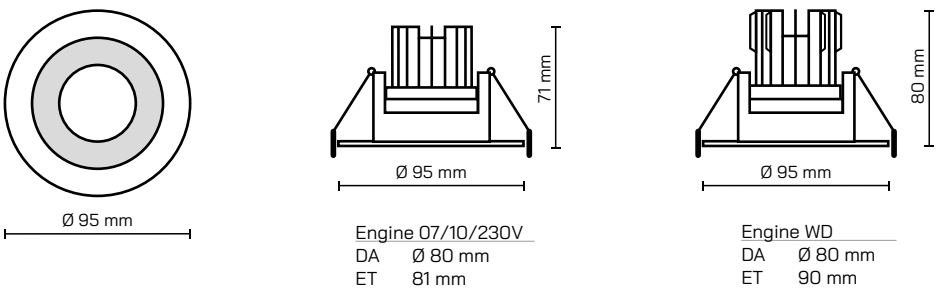

Artikelnummer	Farbe	DALI PUSH	Leistung	Lichtfarbe	Lichtstrom	Primär	Sekundär	Winkel	CRI
LW25-R3-07-2700-1-	1	2	7W	2700K	840lm	220-240V	180mA	30°	CRI>90
LW25-R3-07-3000-1-	1	2	7W	3000K	879lm	220-240V	180mA	30°	CRI>90
LW25-R3-07-4000-1-	1	2	7W	4000K	905lm	220-240V	180mA	30°	CRI>90
LW25-R3-10-2700-1-	1	2	10W	2700K	1199lm	220-240V	250mA	30°	CRI>90
LW25-R3-10-3000-1-	1	2	10W	3000K	1255lm	220-240V	250mA	30°	CRI>90
LW25-R3-10-4000-1-	1	2	10W	4000K	1305lm	220-240V	250mA	30°	CRI>90
LW25-R3-11-WD-1-	1	2	10,8W	1800K - 3000K	885lm	220-240V	300mA	30°	CRI>90
LW25-R3-10-TW-1-	1	2	10,8W	2700K - 6500K	696lm - 1167 lm	220-240V	300mA	30°	CRI>90
LW25-R3-230-2700-	1	-	6W/230V	2700K	537lm	220-240V	230V	30°	CRI>90
LW25-R3-230-3000-	1	-	6W/230V	3000K	562lm	220-240V	230V	30°	CRI>90

- 1

BB schwarz/schwarz
BG schwarz/gold
BW schwarz/weiß

WB weiß/schwarz
WG weiß/gold
WW weiß/weiß
- 2

- TRIAC (Standard)
D DALI/PUSH

