


SPOTY ROUND Ø 78MM, SCHWENKBAR

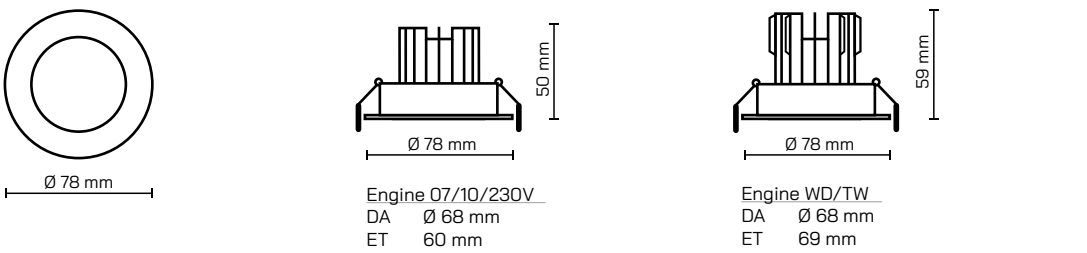

| Artikelnummer     | Farbe | DALI<br>PUSH | Leistung | Lichtfarbe    | Lichtstrom     | Primär   | Sekundär | Winkel | CRI    |
|-------------------|-------|--------------|----------|---------------|----------------|----------|----------|--------|--------|
| LW25-R-07-2700-1- | 1     | 2            | 7W       | 2700K         | 840lm          | 220-240V | 180mA    | 30°    | CRI>93 |
| LW25-R-07-3000-1- | 1     | 2            | 7W       | 3000K         | 879lm          | 220-240V | 180mA    | 30°    | CRI>93 |
| LW25-R-07-4000-1- | 1     | 2            | 7W       | 4000K         | 905lm          | 220-240V | 180mA    | 30°    | CRI>93 |
| LW25-R-10-2700-1- | 1     | 2            | 10W      | 2700K         | 1199lm         | 220-240V | 250mA    | 30°    | CRI>93 |
| LW25-R-10-3000-1- | 1     | 2            | 10W      | 3000K         | 1255lm         | 220-240V | 250mA    | 30°    | CRI>93 |
| LW25-R-10-4000-1- | 1     | 2            | 10W      | 4000K         | 1305lm         | 220-240V | 250mA    | 30°    | CRI>93 |
| LW25-R-11-WD-1-   | 1     | 2            | 10,8W    | 1800K - 3000K | 885lm          | 220-240V | 300mA    | 30°    | CRI>90 |
| LW25-R-10-TW-1-   | 1     | 2            | 10,8W    | 2700K - 6500K | 696lm - 1167lm | 220-240V | 300mA    | 30°    | CRI>90 |
| LW25-R-230-2700-  | 1     | -            | 6W/230V  | 2700K         | 537lm          | 220-240V | 230V     | 30°    | CRI>90 |
| LW25-R-230-3000-  | 1     | -            | 6W/230V  | 3000K         | 562lm          | 220-240V | 230V     | 30°    | CRI>90 |

- 1

B schwarz

S alu gebürstet

W weiß
- 2

- TRIAC (Standard)

D DALI/PUSH

